



There's only one #1™

Project _____
Item # _____
Quantity _____


Glo-Ray® Heated Shelves

Models: GRS-18, -24, -30, -36, -42, -48, -54, -60, -66, -72

The Hatco Glo-Ray® Heated Shelf has an extruded aluminum base with non-slip rubber feet, stainless steel top and blanket-type element for uniform heat distribution. Fiberglass insulation keeps heat at the holding surface while a built-in adjustable thermostat controls surface temperature. Ideal for pass-through areas, buffet lines or as a heated work shelf.

Standard features

- Uniform heat distribution with blanket-type element
- Built-in adjustable thermostat controls surface temperature
- Available in widths from 18" to 72" (457-1829 mm) and depths from 6" to 25.5" (152-648 mm)
- Extruded aluminum base with stainless steel top (optional hardcoated aluminum surface)
- Standard Legs:
 - Units 36" (914 mm) wide and under: 1" (25 mm) legs
 - Units 42" (1067 mm) or wider: 4" (102 mm) legs
- All models include a 72" (1829 mm) cord and plug attached.

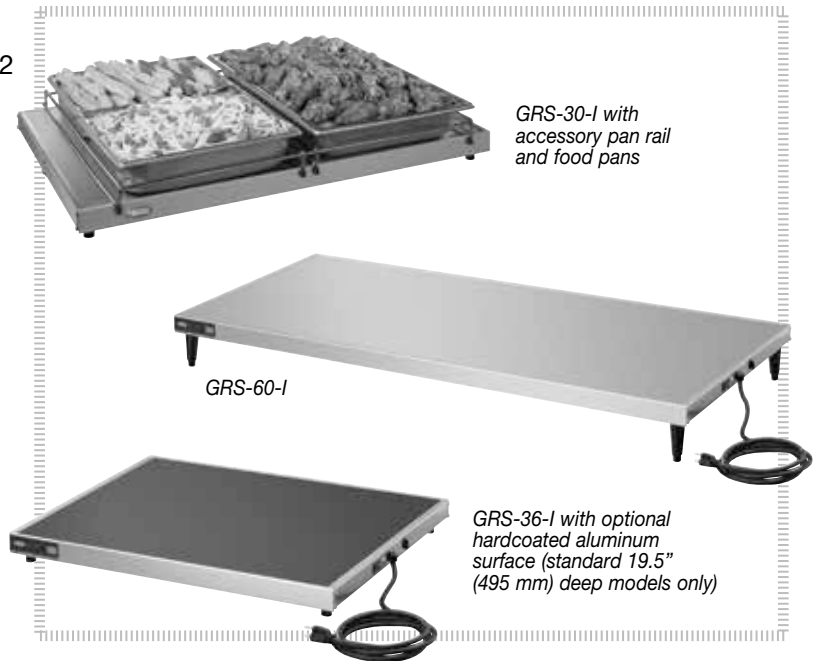

Options (available at time of purchase only)

Designer Color† (top surface not painted) – Clear Anodized standard

- | | | | |
|------------------------------------|---------------------------------------|---|--|
| ☐ Warm Red | ☐ Black | ☐ Gray Granite | ☐ White Granite |
| ☐ Navy Blue | ☐ Hunter Green | ☐ Antique Copper | |

Hardcoated Surface in lieu of Stainless Steel on Standard 19.5" (495 mm) deep "I" units - please consult factory for other depths

- | | |
|--|--|
| ☐ GRS-18 through GRS-42 | ☐ GRS-48 through GRS-72 |
|--|--|

Accessories

☐ 4" (102 mm) adjustable Legs (standard on GRS-42 units and larger)

Pan Rail for 19.5" (495 mm) models only

- | | | | |
|--------------------------------|--------------------------------|--------------------------------|--------------------------------|
| ☐ 2-Pan | ☐ 3-Pan | ☐ 4-Pan | ☐ 5-Pan |
|--------------------------------|--------------------------------|--------------------------------|--------------------------------|

†Non-standard colors are non-returnable




HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

(800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | equipsales@hatcocorp.com | intlsales@hatcocorp.com



Glo-Ray® Heated Shelves

Models: GRS-18, -24, -30, -36, -42, -48, -54, -60, -66, -72

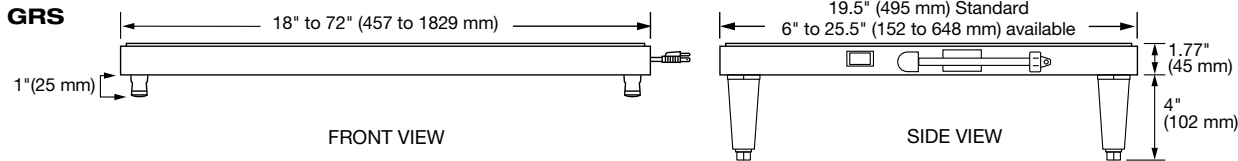

Units 36" (914 mm) in width or weighing more than 80 lbs. (36 kg) need to be either sealed, or raised from the installation surface with 4" (102 mm) legs (included)

SPECIFICATIONS Glo-Ray® Heated Shelves

The shaded areas contain electrical information for International models

19.5" (495 mm) DEPTH (I)

Model	Dimensions* (W x H)	Voltages Single Phase	Watts	Amps	Plug	Ship Weight†
GRS-18-I	18" x 2.25" (457 x 57 mm)	100	250	2.5	NEMA 5-15P	16 lbs (8 kg)
		120	250	2.1	NEMA 5-15P	
		220	228	1.0	CEE 7/7 Schuko	
		240	272	1.1	BS-1363	
		220-230 (CE)	228-250	1.0-1.1	CEE 7/7 Schuko	
		230-240 (CE)	250-272	1.1	BS-1363	
GRS-24-I	24" x 2.25" (610 x 57 mm)	100	350	3.5	NEMA 5-15P	20 lbs (10 kg)
		120	350	2.9	NEMA 5-15P	
		220	320	1.5	CEE 7/7 Schuko	
		240	380	1.6	BS-1363	
		220-230 (CE)	320-350	1.5-1.6	CEE 7/7 Schuko	
		230-240 (CE)	350-380	1.5-1.6	BS-1363	
GRS-30-I	30" x 2.25" (762 x 57 mm)	100	450	4.5	NEMA 5-15P	25 lbs (12 kg)
		120	450	3.8	NEMA 5-15P	
		220	412	1.9	CEE 7/7 Schuko	
		240	490	2.0	BS-1363	
		220-230 (CE)	412-450	1.9-2.0	CEE 7/7 Schuko	
		230-240 (CE)	450-490	2.0	BS-1363	
GRS-36-I	36" x 2.25" (914 x 57 mm)	100	550	5.5	NEMA 5-15P	28 lbs (13 kg)
		120	550	4.6	NEMA 5-15P	
		220	504	2.3	CEE 7/7 Schuko	
		240	598	2.5	BS-1363	
		220-230 (CE)	504-550	2.3-2.4	CEE 7/7 Schuko	
		230-240 (CE)	550-598	2.4-2.5	BS-1363	
GRS-42-I*	42" x 5.25" (1067 x 133 mm)	100	600	6.0	NEMA 5-15P	32 lbs (15 kg)
		120	600	5.0	NEMA 5-15P	
		220	548	2.5	CEE 7/7 Schuko	
		240	652	2.7	BS-1363	
		220-230 (CE)	548-600	2.5-2.6	CEE 7/7 Schuko	
		230-240 (CE)	600-652	2.6-2.7	BS-1363	

19.5" (495 mm) DEPTH (I)

Model	Dimensions (W x H)	Voltages Single phase	Watts	Amps	Plug	Ship Weight†
GRS-48-I*	48" x 5.25" (1219 x 133 mm)	100	700	7.0	NEMA 5-15P	36 lbs (17 kg)
		120	700	5.8	NEMA 5-15P	
		220	640	3.0	CEE 7/7 Schuko	
		240	760	3.2	BS-1363	
		220-230 (CE)	640-700	2.9-3.0	CEE 7/7 Schuko	
		230-240 (CE)	700-760	3.0-3.2	BS-1363	
GRS-54-I*	54" x 5.25" (1372 x 133 mm)	100	800	8.0	NEMA 5-15P	42 lbs. (20 kg)
		120	800	6.7	NEMA 5-15P	
		220	732	3.3	CEE 7/7 Schuko	
		240	870	3.6	BS-1363	
		220-230 (CE)	732-800	3.3-3.5	CEE 7/7 Schuko	
		220-240 (CE)	800-870	3.5-3.6	BS-1363	
GRS-60-I*	60" x 5.25" (1524 x 133 mm)	100	900	9.0	NEMA 5-15P	44 lbs. (20 kg)
		120	900	7.5	NEMA 5-15P	
		220	824	3.7	CEE 7/7 Schuko	
		240	980	4.1	BS-1363	
		220-230 (CE)	824-900	3.7-3.9	CEE 7/7 Schuko	
		220-240 (CE)	900-980	3.9-4.1	BS-1363	
GRS-66-I*	66" x 5.25" (1676 x 133 mm)	100	1000	10.0	NEMA 5-15P	50 lbs (23 kg)
		120	1000	8.3	NEMA 5-15P	
		220	916	4.2	CEE 7/7 Schuko	
		240	1088	4.5	BS-1363	
		220-230 (CE)	915-1000	4.2-4.3	CEE 7/7 Schuko	
		230-240 (CE)	1000-1088	4.3-4.5	BS-1363	
GRS-72-I*	72" x 5.25" (1829 x 133 mm)	100	1100	11.0	NEMA 5-15P	56 lbs (26 kg)
		120	1100	9.2	NEMA 5-15P	
		220	1008	4.6	CEE 7/7 Schuko	
		240	1196	5.0	BS-1363	
		220-230 (CE)	1006-1100	4.6-4.8	CEE 7/7 Schuko	
		230-240 (CE)	1100-1196	4.8-5.0	BS-1363	

* Units 36" (914 mm) wide or less, height includes 1" (25 mm) legs. Units over 42" (1067 mm) wide, height includes 4" (1067 mm) legs.

† NSF requires units over 36" (914 mm) in width or weighing more than 80 lbs. (36 kg) to be either sealed, or raised on the installation surface with the 4" (102 mm) legs included.

† Shipping weight includes packaging.

Pan Capacity

Accommodates 12" x 20" (305 x 508 mm) steam table pans

Model	Capacity	Model	Capacity
GRS-18-I	1 pan	GRS-48-I	3 pans
GRS-24-I	1 pan	GRS-54-I	4 pans
GRS-30-I	2 pans	GRS-60-I	4 pans
GRS-36-I	2 pans	GRS-66-I	5 pans
GRS-42-I	3 pans	GRS-72-I	5 pans

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

(800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | equipsales@hatcocorp.com | intl@hatcocorp.com



Glo-Ray® Heated Shelves

Models: GRS-18, -24, -30, -36, -42, -48, -54, -60, -66, -72

SPECIFICATIONS

Glo-Ray® Heated Shelves

The shaded areas contain electrical information for International models

6" (152 mm) DEPTH (A)

Model	Dimensions (W x H)	Voltages Single Phase	Watts	Amps	Plug	Ship Weight†
GRS-18-A	18" x 2.25" (457 x 57 mm)	120	100	0.8	NEMA 5-15P	10 lbs (5 kg)
		220	91	0.4	CEE 7/7 Schuko	
		240	109	0.5	BS-1363	
		220-230 (CE)	91-100	0.4	CEE 7/7 Schuko	
		230-240 (CE)	100-109	0.4-0.5	BS-1363	
GRS-24-A	24" x 2.25" (610 x 57 mm)	120	125	1.0	NEMA 5-15P	11 lbs (5 kg)
		220	114	0.5	CEE 7/7 Schuko	
		240	136	0.6	BS-1363	
		220-230 (CE)	114-125	0.5	CEE 7/7 Schuko	
		230-240 (CE)	125-136	0.5-0.6	BS-1363	
GRS-30-A	30" x 2.25" (762 x 57 mm)	120	150	1.3	NEMA 5-15P	9 lbs (5 kg)
		220	137	0.6	CEE 7/7 Schuko	
		240	163	0.7	BS-1363	
		220-230 (CE)	137-150	0.6-0.7	CEE 7/7 Schuko	
		230-240 (CE)	150-163	0.7	BS-1363	
GRS-36-A	36" x 2.25" (914 x 57 mm)	120	175	1.5	NEMA 5-15P	11 lbs (5 kg)
		220	160	0.7	CEE 7/7 Schuko	
		240	190	0.8	BS-1363	
		220-230 (CE)	160-175	0.6-0.8	CEE 7/7 Schuko	
		230-240 (CE)	175-190	0.8	BS-1363	
GRS-42-A*	42" x 5.25" (1067 x 133 mm)	120	225	1.9	NEMA 5-15P	15 lbs (7 kg)
		220	205	0.9	CEE 7/7 Schuko	
		240	245	1.0	BS-1363	
		220-230 (CE)	205-225	0.9-1.0	CEE 7/7 Schuko	
		230-240 (CE)	225-245	1.0	BS-1363	
GRS-48-A*	48" x 5.25" (1219 x 133 mm)	120	250	2.1	NEMA 5-15P	16 lbs (8 kg)
		220	228	1.0	CEE 7/7 Schuko	
		240	272	1.1	BS-1363	
		220-230 (CE)	228-250	1.0-1.1	CEE 7/7 Schuko	
		230-240 (CE)	250-272	1.1	BS-1363	
GRS-54-A*	54" x 5.25" (1372 x 133 mm)	120	275	2.3	NEMA 5-15P	17 lbs (8 kg)
		220	251	1.1	CEE 7/7 Schuko	
		240	299	1.2	BS-1363	
		220-230 (CE)	251-275	1.1-1.2	CEE 7/7 Schuko	
		230-240 (CE)	275-299	1.2	BS-1363	
GRS-60-A*	60" x 5.25" (1524 x 133 mm)	120	300	2.5	NEMA 5-15P	18 lbs (9 kg)
		220	274	1.2	CEE 7/7 Schuko	
		240	326	1.4	BS-1363	
		220-230 (CE)	274-300	1.2-1.3	CEE 7/7 Schuko	
		230-240 (CE)	300-326	1.3-1.4	BS-1363	
GRS-66-A*	66" x 5.25" (1676 x 133 mm)	120	325	2.7	NEMA 5-15P	20 lbs (9 kg)
		220	297	1.4	CEE 7/7 Schuko	
		240	353	1.5	BS-1363	
		220-230 (CE)	297-325	1.4	CEE 7/7 Schuko	
		230-240 (CE)	325-353	1.4-1.5	BS-1363	
GRS-72-A*	72" x 5.25" (1829 x 133 mm)	120	350	2.9	NEMA 5-15P	22 lbs (10 kg)
		220	320	1.5	CEE 7/7 Schuko	
		240	380	1.6	BS-1363	
		220-230 (CE)	320-350	1.5	CEE 7/7 Schuko	
		230-240 (CE)	350-380	1.5-1.6	BS-1363	

7.75" (152 mm) DEPTH (B)

Model	Dimensions (W x H)	Voltages Single phase	Watts	Amps	Plug	Ship Weight†
GRS-18-B	18" x 2.25" (457 x 57 mm)	120	100	0.8	NEMA 5-15P	10 lbs (5 kg)
		220	91	0.4	CEE 7/7 Schuko	
		240	109	0.5	BS-1363	
		220-230 (CE)	91-100	0.4	CEE 7/7 Schuko	
		230-240 (CE)	100-109	0.4-0.5	BS-1363	
GRS-24-B	24" x 2.25" (610 x 57 mm)	120	125	1.0	NEMA 5-15P	11 lbs (5 kg)
		220	114	0.5	CEE 7/7 Schuko	
		240	136	0.6	BS-1363	
		220-230 (CE)	114-125	0.5	CEE 7/7 Schuko	
		230-240 (CE)	125-136	0.5-0.6	BS-1363	
GRS-30-B	30" x 2.25" (762 x 57 mm)	120	150	1.3	NEMA 5-15P	12 lbs (6 kg)
		220	137	0.6	CEE 7/7 Schuko	
		240	163	0.7	BS-1363	
		220-230 (CE)	137-150	0.6-0.7	CEE 7/7 Schuko	
		230-240 (CE)	150-163	0.7	BS-1363	
GRS-36-B	36" x 2.25" (914 x 57 mm)	120	175	1.5	NEMA 5-15P	14 lbs (7 kg)
		220	160	0.7	CEE 7/7 Schuko	
		240	190	0.8	BS-1363	
		220-230 (CE)	160-175	0.6-0.8	CEE 7/7 Schuko	
		230-240 (CE)	175-190	0.8	BS-1363	
GRS-42-B*	42" x 5.25" (1067 x 133 mm)	120	225	1.9	NEMA 5-15P	17 lbs (8 kg)
		220	205	0.9	CEE 7/7 Schuko	
		240	245	1.0	BS-1363	
		220-230 (CE)	205-225	0.9-1.0	CEE 7/7 Schuko	
		230-240 (CE)	225-245	1.0	BS-1363	
GRS-48-B*	48" x 5.25" (1219 x 133 mm)	120	250	2.1	NEMA 5-15P	19 lbs (9 kg)
		220	228	1.0	CEE 7/7 Schuko	
		240	272	1.1	BS-1363	
		220-230 (CE)	228-250	1.0-1.1	CEE 7/7 Schuko	
		230-240 (CE)	250-272	1.1	BS-1363	
GRS-54-B*	54" x 5.25" (1372 x 133 mm)	120	275	2.3	NEMA 5-15P	20 lbs (10 kg)
		220	251	1.1	CEE 7/7 Schuko	
		240	299	1.2	BS-1363	
		220-230 (CE)	251-275	1.1-1.2	CEE 7/7 Schuko	
		230-240 (CE)	275-299	1.2	BS-1363	
GRS-60-B*	60" x 5.25" (1524 x 133 mm)	120	300	2.5	NEMA 5-15P	21 lbs (10 kg)
		220	274	1.2	CEE 7/7 Schuko	
		240	326	1.4	BS-1363	
		220-230 (CE)	274-300	1.2-1.3	CEE 7/7 Schuko	
		230-240 (CE)	300-326	1.3-1.4	BS-1363	
GRS-66-B*	66" x 5.25" (1676 x 133 mm)	120	325	2.7	NEMA 5-15P	23 lbs (11 kg)
		220	297	1.4	CEE 7/7 Schuko	
		240	353	1.5	BS-1363	
		220-230 (CE)	297-325	1.4	CEE 7/7 Schuko	
		230-240 (CE)	325-353	1.4-1.5	BS-1363	
GRS-72-B*	72" x 5.25" (1829 x 133 mm)	120	350	2.9	NEMA 5-15P	25 lbs (12 kg)
		220	320	1.5	CEE 7/7 Schuko	
		240	380	1.6	BS-1363	
		220-230 (CE)	320-350	1.5	CEE 7/7 Schuko	
		230-240 (CE)	350-380	1.5-1.6	BS-1363	

* Units 36" (914 mm) wide or less, height includes 1" (25 mm) legs. Units over 42" (1067 mm) wide, height includes 4" (1067 mm) legs.

† NSF requires units over 36" (914 mm) in width or weighing more than 80 lbs. (36 kg) to be either sealed, or raised on the installation surface with the 4" (102 mm) legs included.

† Shipping weight includes packaging.

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

(800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | equipsales@hatcocorp.com | intl@hatcocorp.com



Glo-Ray® Heated Shelves

Models: GRS-18, -24, -30, -36, -42, -48, -54, -60, -66, -72

SPECIFICATIONS

Glo-Ray® Heated Shelves

The shaded areas contain electrical information for International models

9.75" (248 mm) DEPTH (C)

Model	Dimensions (W x H)	Voltages Single Phase	Watts	Amps	Plug	Ship Weight†
GRS-18-C	18" x 2.25" (457 x 57 mm)	120	125	1.0	NEMA 5-15P	12 lbs (6 kg)
		220	114	0.5	CEE 7/7 Schuko	
		240	136	0.6	BS-1363	
		220-230 (CE)	114-125	0.5	CEE 7/7 Schuko	
		230-240 (CE)	125-136	0.5-0.6	BS-1363	
GRS-24-C	24" x 2.25" (610 x 57 mm)	120	175	1.5	NEMA 5-15P	13 lbs (6 kg)
		220	160	0.7	CEE 7/7 Schuko	
		240	190	0.8	BS-1363	
		220-230 (CE)	160-175	0.7-0.8	CEE 7/7 Schuko	
		230-240 (CE)	175-190	0.8	BS-1363	
GRS-30-C	30" x 2.25" (762 x 57 mm)	120	225	1.9	NEMA 5-15P	14 lbs (7 kg)
		220	206	0.9	CEE 7/7 Schuko	
		240	245	1.0	BS-1363	
		220-230 (CE)	206-225	0.9-1.0	CEE 7/7 Schuko	
		230-240 (CE)	225-245	1.0	BS-1363	
GRS-36-C	36" x 2.25" (914 x 57 mm)	120	275	2.3	NEMA 5-15P	16 lbs (8 kg)
		220	252	1.1	CEE 7/7 Schuko	
		240	299	1.2	BS-1363	
		220-230 (CE)	252-275	1.1-1.2	CEE 7/7 Schuko	
		230-240 (CE)	275-299	1.2	BS-1363	
GRS-42-C*	42" x 5.25" (1067 x 133 mm)	120	300	2.5	NEMA 5-15P	18 lbs (9 kg)
		220	274	1.2	CEE 7/7 Schuko	
		240	326	1.4	BS-1363	
		220-230 (CE)	274-300	1.2-1.3	CEE 7/7 Schuko	
		230-240 (CE)	300-326	1.3-1.4	BS-1363	
GRS-48-C*	48" x 5.25" (1219 x 133 mm)	120	350	2.9	NEMA 5-15P	20 lbs (9 kg)
		220	320	1.5	CEE 7/7 Schuko	
		240	380	1.6	BS-1363	
		220-230 (CE)	320-350	1.5	CEE 7/7 Schuko	
		230-240 (CE)	350-380	1.5-1.6	BS-1363	
GRS-54-C*	54" x 5.25" (1372 x 133 mm)	120	400	3.3	NEMA 5-15P	22 lbs (10 kg)
		220	366	1.7	CEE 7/7 Schuko	
		240	435	1.8	BS-1363	
		220-230 (CE)	366-400	1.7-1.8	CEE 7/7 Schuko	
		230-240 (CE)	400-435	1.7-1.8	BS-1363	
GRS-60-C*	60" x 5.25" (1524 x 133 mm)	120	450	3.8	NEMA 5-15P	25 lbs (12 kg)
		220	412	1.9	CEE 7/7 Schuko	
		240	490	2.0	BS-1363	
		220-230 (CE)	412-450	1.9-2.0	CEE 7/7 Schuko	
		230-240 (CE)	450-490	2.0	BS-1363	
GRS-66-C*	66" x 5.25" (1676 x 133 mm)	120	500	4.2	NEMA 5-15P	26 lbs (12 kg)
		220	458	2.1	CEE 7/7 Schuko	
		240	544	2.3	BS-1363	
		220-230 (CE)	458-500	2.1-2.2	CEE 7/7 Schuko	
		230-240 (CE)	500-544	2.2-2.3	BS-1363	
GRS-72-C*	72" x 5.25" (1829 x 133 mm)	120	550	4.6	NEMA 5-15P	28 lbs (13 kg)
		220	504	2.3	CEE 7/7 Schuko	
		240	598	2.5	BS-1363	
		220-230 (CE)	504-550	2.3-2.4	CEE 7/7 Schuko	
		230-240 (CE)	550-598	2.4-2.5	BS-1363	

12" (305 mm) DEPTH (D)

Model	Dimensions (W x H)	Voltages Single phase	Watts	Amps	Plug	Ship Weight†
GRS-18-D	18" x 2.25" (457 x 57 mm)	120	200	1.7	NEMA 5-15P	12 lbs (6 kg)
		220	181	0.8	CEE 7/7 Schuko	
		240	218	0.9	BS-1363	
		220-230 (CE)	182-200	0.8-0.9	CEE 7/7 Schuko	
		230-240 (CE)	200-218	0.9	BS-1363	
GRS-24-D	24" x 2.25" (610 x 57 mm)	120	250	2.1	NEMA 5-15P	15 lbs (7 kg)
		220	228	1.0	CEE 7/7 Schuko	
		240	272	1.1	BS-1363	
		220-230 (CE)	228-250	1.0-1.1	CEE 7/7 Schuko	
		230-240 (CE)	250-272	1.1	BS-1363	
GRS-30-D	30" x 2.25" (762 x 57 mm)	120	300	2.5	NEMA 5-15P	17 lbs (8 kg)
		220	274	1.2	CEE 7/7 Schuko	
		240	326	1.4	BS-1363	
		220-230 (CE)	246-300	1.1-1.3	CEE 7/7 Schuko	
		230-240 (CE)	300-326	1.3-1.4	BS-1363	
GRS-36-D	36" x 2.25" (914 x 57 mm)	120	350	2.9	NEMA 5-15P	20 lbs (9 kg)
		220	320	1.5	CEE 7/7 Schuko	
		240	380	1.6	BS-1363	
		220-230 (CE)	320-350	1.5	CEE 7/7 Schuko	
		230-240 (CE)	350-380	1.5-1.6	BS-1363	
GRS-42-D*	42" x 5.25" (1067 x 133 mm)	120	450	3.8	NEMA 5-15P	23 lbs (11 kg)
		220	410	1.9	CEE 7/7 Schuko	
		240	490	2.0	BS-1363	
		220-230 (CE)	410-450	1.9-2.0	CEE 7/7 Schuko	
		230-240 (CE)	450-490	2.0-2.1	BS-1363	
GRS-48-D*	48" x 5.25" (1219 x 133 mm)	120	500	4.2	NEMA 5-15P	26 lbs (12 kg)
		220	456	2.1	CEE 7/7 Schuko	
		240	544	2.3	BS-1363	
		220-230 (CE)	456-500	2.1-2.2	CEE 7/7 Schuko	
		230-240 (CE)	500-544	2.2-2.3	BS-1363	
GRS-54-D*	54" x 5.25" (1372 x 133 mm)	120	550	4.6	NEMA 5-15P	30 lbs (14 kg)
		220	502	2.3	CEE 7/7 Schuko	
		240	598	2.5	BS-1363	
		220-230 (CE)	502-550	2.3-2.4	CEE 7/7 Schuko	
		230-240 (CE)	550-598	2.4-2.5	BS-1363	
GRS-60-D*	60" x 5.25" (1524 x 133 mm)	120	600	5.0	NEMA 5-15P	34 lbs (16 kg)
		220	548	2.5	CEE 7/7 Schuko	
		240	652	2.7	BS-1363	
		220-230 (CE)	548-600	2.5-2.6	CEE 7/7 Schuko	
		230-240 (CE)	600-652	2.6-2.7	BS-1363	
GRS-66-D*	66" x 5.25" (1676 x 133 mm)	120	650	5.4	NEMA 5-15P	36 lbs (17 kg)
		220	594	2.7	CEE 7/7 Schuko	
		240	706	2.9	BS-1363	
		220-230 (CE)	594-650	2.7-2.8	CEE 7/7 Schuko	
		230-240 (CE)	650-706	2.8-2.9	BS-1363	
GRS-72-D*	72" x 5.25" (1829 x 133 mm)	120	700	5.8	NEMA 5-15P	37 lbs (17 kg)
		220	640	3.0	CEE 7/7 Schuko	
		240	760	3.2	BS-1363	
		220-230 (CE)	640-700	2.9-3.0	CEE 7/7 Schuko	
		230-240 (CE)	700-760	3.1-3.2	BS-1363	

* Units 36" (914 mm) wide or less, height includes 1" (25 mm) legs. Units over 42" (1067 mm) wide, height includes 4" (1067 mm) legs.

† NSF requires units over 36" (914 mm) in width or weighing more than 80 lbs. (36 kg) to be either sealed, or raised on the installation surface with the 4" (102 mm) legs included.

† Shipping weight includes packaging.

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

(800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | equipsales@hatcocorp.com | intl@hatcocorp.com



Glo-Ray® Heated Shelves

Models: GRS-18, -24, -30, -36, -42, -48, -54, -60, -66, -72

SPECIFICATIONS

Glo-Ray® Heated Shelves

The shaded areas contain electrical information for International models

13.75" (349 mm) DEPTH (E)

Model	Dimensions (W x H)	Voltages Single Phase	Watts	Amps	Plug	Ship Weight†
GRS-18-E	18" x 2.25" (457 x 57 mm)	120	200	1.7	NEMA 5-15P	13 lbs (6 kg)
		220	181	0.8	CEE 7/7 Schuko	
		240	218	0.9	BS-1363	
		220-230 (CE)	182-200	0.8-0.9	CEE 7/7 Schuko	
		230-240 (CE)	200-218	0.9	BS-1363	
GRS-24-E	24" x 2.25" (610 x 57 mm)	120	250	2.1	NEMA 5-15P	14 lbs (7 kg)
		220	228	1.0	CEE 7/7 Schuko	
		240	272	1.1	BS-1363	
		220-230 (CE)	228-250	1.0-1.1	CEE 7/7 Schuko	
		230-240 (CE)	250-272	1.1	BS-1363	
GRS-30-E	30" x 2.25" (762 x 57 mm)	120	300	2.5	NEMA 5-15P	18 lbs (9 kg)
		220	274	1.2	CEE 7/7 Schuko	
		240	326	1.4	BS-1363	
		220-230 (CE)	246-300	1.1-1.3	CEE 7/7 Schuko	
		230-240 (CE)	300-326	1.3-1.4	BS-1363	
GRS-36-E	36" x 2.25" (914 x 57 mm)	120	350	2.9	NEMA 5-15P	22 lbs (10 kg)
		220	320	1.5	CEE 7/7 Schuko	
		240	380	1.6	BS-1363	
		220-230 (CE)	320-350	1.5	CEE 7/7 Schuko	
		230-240 (CE)	350-380	1.5-1.6	BS-1363	
GRS-42-E♦	42" x 5.25" (1067 x 133 mm)	120	450	3.8	NEMA 5-15P	26 lbs (12 kg)
		220	410	1.9	CEE 7/7 Schuko	
		240	490	2.0	BS-1363	
		220-230 (CE)	410-450	1.9-2.0	CEE 7/7 Schuko	
		230-240 (CE)	450-490	2.0-2.1	BS-1363	
GRS-48-E♦	48" x 5.25" (1219 x 133 mm)	120	500	4.2	NEMA 5-15P	29 lbs (14 kg)
		220	456	2.1	CEE 7/7 Schuko	
		240	544	2.3	BS-1363	
		220-230 (CE)	456-500	2.1-2.2	CEE 7/7 Schuko	
		230-240 (CE)	500-544	2.2-2.3	BS-1363	
GRS-54-E♦	54" x 5.25" (1372 x 133 mm)	120	550	4.6	NEMA 5-15P	33 lbs (15 kg)
		220	502	2.3	CEE 7/7 Schuko	
		240	598	2.5	BS-1363	
		220-230 (CE)	502-550	2.3-2.4	CEE 7/7 Schuko	
		230-240 (CE)	550-598	2.4-2.5	BS-1363	
GRS-60-E♦	60" x 5.25" (1524 x 133 mm)	120	600	5.0	NEMA 5-15P	36 lbs (17 kg)
		220	548	2.5	CEE 7/7 Schuko	
		240	652	2.7	BS-1363	
		220-230 (CE)	548-600	2.5-2.6	CEE 7/7 Schuko	
		230-240 (CE)	600-652	2.6-2.7	BS-1363	
GRS-66-E♦	66" x 5.25" (1676 x 133 mm)	120	650	5.4	NEMA 5-15P	38 lbs (18 kg)
		220	594	2.7	CEE 7/7 Schuko	
		240	706	2.9	BS-1363	
		220-230 (CE)	594-650	2.7-2.8	CEE 7/7 Schuko	
		230-240 (CE)	650-706	2.8-2.9	BS-1363	
GRS-72-E♦	72" x 5.25" (1829 x 133 mm)	120	700	5.8	NEMA 5-15P	40 lbs (19 kg)
		220	640	3.0	CEE 7/7 Schuko	
		240	760	3.2	BS-1363	
		220-230 (CE)	640-700	2.9-3.0	CEE 7/7 Schuko	
		230-240 (CE)	700-760	3.1-3.2	BS-1363	

15.5" (394 mm) DEPTH (F)

Model	Dimensions (W x H)	Voltages Single phase	Watts	Amps	Plug	Ship Weight†
GRS-18-F	18" x 2.25" (457 x 57 mm)	120	200	1.7	NEMA 5-15P	16 lbs (7 kg)
		220	181	0.8	CEE 7/7 Schuko	
		240	218	0.9	BS-1363	
		220-230 (CE)	182-200	0.8-0.9	CEE 7/7 Schuko	
		230-240 (CE)	200-218	0.9	BS-1363	
GRS-24-F	24" x 2.25" (610 x 57 mm)	120	250	2.1	NEMA 5-15P	17 lbs (8 kg)
		220	228	1.0	CEE 7/7 Schuko	
		240	272	1.1	BS-1363	
		220-230 (CE)	228-250	1.0-1.1	CEE 7/7 Schuko	
		230-240 (CE)	250-272	1.1	BS-1363	
GRS-30-F	30" x 2.25" (762 x 57 mm)	120	300	2.5	NEMA 5-15P	22 lbs (10 kg)
		220	274	1.2	CEE 7/7 Schuko	
		240	326	1.4	BS-1363	
		220-230 (CE)	246-300	1.1-1.3	CEE 7/7 Schuko	
		230-240 (CE)	300-326	1.3-1.4	BS-1363	
GRS-36-F	36" x 2.25" (914 x 57 mm)	120	350	2.9	NEMA 5-15P	25 lbs (12 kg)
		220	320	1.5	CEE 7/7 Schuko	
		240	380	1.6	BS-1363	
		220-230 (CE)	320-350	1.5	CEE 7/7 Schuko	
		230-240 (CE)	350-380	1.5-1.6	BS-1363	
GRS-42-F♦	42" x 5.25" (1067 x 133 mm)	120	450	3.8	NEMA 5-15P	26 lbs (12 kg)
		220	410	1.9	CEE 7/7 Schuko	
		240	490	2.0	BS-1363	
		220-230 (CE)	410-450	1.9-2.0	CEE 7/7 Schuko	
		230-240 (CE)	450-490	2.0-2.1	BS-1363	
GRS-48-F♦	48" x 5.25" (1219 x 133 mm)	120	500	4.2	NEMA 5-15P	32 lbs (15 kg)
		220	456	2.1	CEE 7/7 Schuko	
		240	544	2.3	BS-1363	
		220-230 (CE)	456-500	2.1-2.2	CEE 7/7 Schuko	
		230-240 (CE)	500-544	2.2-2.3	BS-1363	
GRS-54-F♦	54" x 5.25" (1372 x 133 mm)	120	550	4.6	NEMA 5-15P	38 lbs (18 kg)
		220	502	2.3	CEE 7/7 Schuko	
		240	598	2.5	BS-1363	
		220-230 (CE)	502-550	2.3-2.4	CEE 7/7 Schuko	
		230-240 (CE)	550-598	2.4-2.5	BS-1363	
GRS-60-F♦	60" x 5.25" (1524 x 133 mm)	120	600	5.0	NEMA 5-15P	39 lbs (18 kg)
		220	548	2.5	CEE 7/7 Schuko	
		240	652	2.7	BS-1363	
		220-230 (CE)	548-600	2.5-2.6	CEE 7/7 Schuko	
		230-240 (CE)	600-652	2.6-2.7	BS-1363	
GRS-66-F♦	66" x 5.25" (1676 x 133 mm)	120	650	5.4	NEMA 5-15P	42 lbs (19 kg)
		220	594	2.7	CEE 7/7 Schuko	
		240	706	2.9	BS-1363	
		220-230 (CE)	594-650	2.7-2.8	CEE 7/7 Schuko	
		230-240 (CE)	650-706	2.8-2.9	BS-1363	
GRS-72-F♦	72" x 5.25" (1829 x 133 mm)	120	700	5.8	NEMA 5-15P	46 lbs (21 kg)
		220	640	3.0	CEE 7/7 Schuko	
		240	760	3.2	BS-1363	
		220-230 (CE)	640-700	2.9-3.0	CEE 7/7 Schuko	
		230-240 (CE)	700-760	3.1-3.2	BS-1363	

* Units 36" (914 mm) wide or less, height includes 1" (25 mm) legs. Units over 42" (1067 mm) wide, height includes 4" (1067 mm) legs.

♦ NSF requires units over 36" (914 mm) in width or weighing more than 80 lbs. (36 kg) to be either sealed, or raised on the installation surface with the 4" (102 mm) legs included.

† Shipping weight includes packaging.

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

(800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | equipsales@hatcocorp.com | intlsales@hatcocorp.com



Glo-Ray® Heated Shelves

Models: GRS-18, -24, -30, -36, -42, -48, -54, -60, -66, -72

SPECIFICATIONS

Glo-Ray® Heated Shelves

The shaded areas contain electrical information for International models

15.75" (400 mm) DEPTH (G)

Model	Dimensions (W x H)	Voltages Single Phase	Watts	Amps	Plug	Ship Weight†
GRS-18-G	18" x 2.25" (457 x 57 mm)	120	225	1.9	NEMA 5-15P	16 lbs (7 kg)
		220	205	0.9	CEE 7/7 Schuko	
		240	245	1.0	BS-1363	
		220-230 (CE)	205-225	0.9-1.0	CEE 7/7 Schuko	
		230-240 (CE)	225-245	1.0	BS-1363	
GRS-24-G	24" x 2.25" (610 x 57 mm)	120	300	2.5	NEMA 5-15P	18 lbs (9 kg)
		220	274	1.2	CEE 7/7 Schuko	
		240	326	1.4	BS-1363	
		220-230 (CE)	274-300	1.2-1.3	CEE 7/7 Schuko	
		230-240 (CE)	300-326	1.3-1.4	BS-1363	
GRS-30-G	30" x 2.25" (762 x 57 mm)	120	375	3.1	NEMA 5-15P	21 lbs (10 kg)
		220	343	1.6	CEE 7/7 Schuko	
		240	408	1.7	BS-1363	
		220-230 (CE)	343-375	1.6	CEE 7/7 Schuko	
		230-240 (CE)	375-408	1.6-1.7	BS-1363	
GRS-36-G	36" x 2.25" (914 x 57 mm)	120	450	3.8	NEMA 5-15P	27 lbs (13 kg)
		220	412	1.9	CEE 7/7 Schuko	
		240	489	2.0	BS-1363	
		220-230 (CE)	412-450	1.9-2.0	CEE 7/7 Schuko	
		230-240 (CE)	450-489	2.0	BS-1363	
GRS-42-G*	42" x 5.25" (1067 x 133 mm)	120	525	4.4	NEMA 5-15P	29 lbs (14 kg)
		220	479	2.2	CEE 7/7 Schuko	
		240	571	2.4	BS-1363	
		220-230 (CE)	479-525	2.2-2.3	CEE 7/7 Schuko	
		230-240 (CE)	525-571	2.3-2.4	BS-1363	
GRS-48-G*	48" x 5.25" (1219 x 133 mm)	120	600	5.0	NEMA 5-15P	33 lbs (15 kg)
		220	548	2.5	CEE 7/7 Schuko	
		240	652	2.7	BS-1363	
		220-230 (CE)	548-600	2.5-2.6	CEE 7/7 Schuko	
		230-240 (CE)	600-652	2.6-2.7	BS-1363	
GRS-54-G*	54" x 5.25" (1372 x 133 mm)	120	675	5.6	NEMA 5-15P	38 lbs (18 kg)
		220	617	2.8	CEE 7/7 Schuko	
		240	734	3.1	BS-1363	
		220-230 (CE)	617-675	2.8-2.9	CEE 7/7 Schuko	
		230-240 (CE)	675-734	2.9-3.1	BS-1363	
GRS-60-G*	60" x 5.25" (1524 x 133 mm)	120	750	6.3	NEMA 5-15P	42 lbs (19 kg)
		220	686	3.1	CEE 7/7 Schuko	
		240	816	3.4	BS-1363	
		220-230 (CE)	686-750	3.1-3.3	CEE 7/7 Schuko	
		230-240 (CE)	750-816	3.3-3.4	BS-1363	
GRS-66-G*	66" x 5.25" (1676 x 133 mm)	120	825	6.9	NEMA 5-15P	45 lbs (21 kg)
		220	755	3.4	CEE 7/7 Schuko	
		240	897	3.7	BS-1363	
		220-230 (CE)	755-825	3.4-3.6	CEE 7/7 Schuko	
		230-240 (CE)	825-897	3.6-3.7	BS-1363	
GRS-72-G*	72" x 5.25" (1829 x 133 mm)	120	900	7.5	NEMA 5-15P	46 lbs (21 kg)
		220	824	3.7	CEE 7/7 Schuko	
		240	978	4.1	BS-1363	
		220-230 (CE)	824-900	3.7-3.9	CEE 7/7 Schuko	
		230-240 (CE)	900-978	3.9-4.1	BS-1363	

17.5" (445 mm) DEPTH (H)

Model	Dimensions (W x H)	Voltages Single phase	Watts	Amps	Plug	Ship Weight†
GRS-18-H	18" x 2.25" (457 x 57 mm)	120	225	1.9	NEMA 5-15P	16 lbs (8 kg)
		220	205	0.9	CEE 7/7 Schuko	
		240	245	1.0	BS-1363	
		220-230 (CE)	205-225	0.9-1.0	CEE 7/7 Schuko	
		230-240 (CE)	225-245	1.0	BS-1363	
GRS-24-H	24" x 2.25" (610 x 57 mm)	120	300	2.5	NEMA 5-15P	18 lbs (9 kg)
		220	274	1.2	CEE 7/7 Schuko	
		240	326	1.4	BS-1363	
		220-230 (CE)	274-300	1.2-1.3	CEE 7/7 Schuko	
		230-240 (CE)	300-326	1.3-1.4	BS-1363	
GRS-30-H	30" x 2.25" (762 x 57 mm)	120	375	3.1	NEMA 5-15P	21 lbs (10 kg)
		220	343	1.6	CEE 7/7 Schuko	
		240	408	1.7	BS-1363	
		220-230 (CE)	343-375	1.6	CEE 7/7 Schuko	
		230-240 (CE)	375-408	1.6-1.7	BS-1363	
GRS-36-H	36" x 2.25" (914 x 57 mm)	120	450	3.8	NEMA 5-15P	27 lbs (13 kg)
		220	412	1.9	CEE 7/7 Schuko	
		240	489	2.0	BS-1363	
		220-230 (CE)	412-450	1.9-2.0	CEE 7/7 Schuko	
		230-240 (CE)	450-489	2.0	BS-1363	
GRS-42-H*	42" x 5.25" (1067 x 133 mm)	120	525	4.4	NEMA 5-15P	32 lbs (15 kg)
		220	479	2.2	CEE 7/7 Schuko	
		240	571	2.4	BS-1363	
		220-230 (CE)	479-525	2.2-2.3	CEE 7/7 Schuko	
		230-240 (CE)	525-571	2.3-2.4	BS-1363	
GRS-48-H*	48" x 5.25" (1219 x 133 mm)	120	600	5.0	NEMA 5-15P	35 lbs (16 kg)
		220	548	2.5	CEE 7/7 Schuko	
		240	652	2.7	BS-1363	
		220-230 (CE)	548-600	2.5-2.6	CEE 7/7 Schuko	
		230-240 (CE)	600-652	2.6-2.7	BS-1363	
GRS-54-H*	54" x 5.25" (1372 x 133 mm)	120	675	5.6	NEMA 5-15P	40 lbs (19 kg)
		220	617	2.8	CEE 7/7 Schuko	
		240	734	3.1	BS-1363	
		220-230 (CE)	617-675	2.8-2.9	CEE 7/7 Schuko	
		230-240 (CE)	675-734	2.9-3.1	BS-1363	
GRS-60-H*	60" x 5.25" (1524 x 133 mm)	120	750	6.3	NEMA 5-15P	44 lbs (20 kg)
		220	686	3.1	CEE 7/7 Schuko	
		240	816	3.4	BS-1363	
		220-230 (CE)	686-750	3.1-3.3	CEE 7/7 Schuko	
		230-240 (CE)	750-816	3.3-3.4	BS-1363	
GRS-66-H*	66" x 5.25" (1676 x 133 mm)	120	825	6.9	NEMA 5-15P	49 lbs (23 kg)
		220	755	3.4	CEE 7/7 Schuko	
		240	897	3.7	BS-1363	
		220-230 (CE)	755-825	3.4-3.6	CEE 7/7 Schuko	
		230-240 (CE)	825-897	3.6-3.7	BS-1363	
GRS-72-H*	72" x 5.25" (1829 x 133 mm)	120	900	7.5	NEMA 5-15P	50 lbs (23 kg)
		220	824	3.7	CEE 7/7 Schuko	
		240	978	4.1	BS-1363	
		220-230 (CE)	824-900	3.7-3.9	CEE 7/7 Schuko	
		230-240 (CE)	900-978	3.9-4.1	BS-1363	

* Units 36" (914 mm) wide or less, height includes 1" (25 mm) legs. Units over 42" (1067 mm) wide, height includes 4" (102 mm) legs.

† NSF requires units over 36" (914 mm) in width or weighing more than 80 lbs. (36 kg) to be either sealed, or raised on the installation surface with the 4" (102 mm) legs included.

† Shipping weight includes packaging.

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

(800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | equipsales@hatcocorp.com | intl@hatcocorp.com



Glo-Ray® Heated Shelves

Models: GRS-18, -24, -30, -36, -42, -48, -54, -60, -66, -72

SPECIFICATIONS

Glo-Ray® Heated Shelves

The shaded areas contain electrical information for International models

21.5" (546 mm) DEPTH (J)

Model	Dimensions (W x H)	Voltages Single Phase	Watts	Amps	Plug	Ship Weight†
GRS-18-J	18" x 2.25" (457 x 57 mm)	120	300	2.5	NEMA 5-15P	20 lbs (9 kg)
		220	273	1.2	CEE 7/7 Schuko	
		240	327	1.4	BS-1363	
		220-230 (CE)	273-300	1.2-1.3	CEE 7/7 Schuko	
		230-240 (CE)	300-327	1.3-1.4	BS-1363	
GRS-24-J	24" x 2.25" (610 x 57 mm)	120	375	3.1	NEMA 5-15P	24 lbs (11 kg)
		220	342	1.6	CEE 7/7 Schuko	
		240	408	1.7	BS-1363	
		220-230 (CE)	342-375	1.6	CEE 7/7 Schuko	
		230-240 (CE)	375-408	1.6-1.7	BS-1363	
GRS-30-J	30" x 2.25" (762 x 57 mm)	120	450	3.8	NEMA 5-15P	30 lbs (14 kg)
		220	411	1.9	CEE 7/7 Schuko	
		240	489	2.0	BS-1363	
		220-230 (CE)	411-450	1.9-2.0	CEE 7/7 Schuko	
		230-240 (CE)	450-489	2.0	BS-1363	
GRS-36-J	36" x 2.25" (914 x 57 mm)	120	525	4.4	NEMA 5-15P	33 lbs (15 kg)
		220	480	2.2	CEE 7/7 Schuko	
		240	570	2.4	BS-1363	
		220-230 (CE)	480-525	2.2-2.3	CEE 7/7 Schuko	
		230-240 (CE)	525-570	2.3-2.4	BS-1363	
GRS-42-J*	42" x 5.25" (1067 x 133 mm)	120	675	5.6	NEMA 5-15P	39 lbs (18 kg)
		220	615	2.8	CEE 7/7 Schuko	
		240	735	3.1	BS-1363	
		220-230 (CE)	615-675	2.8-2.9	CEE 7/7 Schuko	
		230-240 (CE)	675-735	2.9-3.1	BS-1363	
GRS-48-J*	48" x 5.25" (1219 x 133 mm)	120	750	6.3	NEMA 5-15P	45 lbs (21 kg)
		220	684	3.1	CEE 7/7 Schuko	
		240	816	3.4	BS-1363	
		220-230 (CE)	684-750	3.1-3.3	CEE 7/7 Schuko	
		230-240 (CE)	750-816	3.3-3.4	BS-1363	
GRS-54-J*	54" x 5.25" (1372 x 133 mm)	120	825	6.9	NEMA 5-15P	49 lbs (23 kg)
		220	753	3.4	CEE 7/7 Schuko	
		240	897	3.7	BS-1363	
		220-230 (CE)	753-825	3.4-3.6	CEE 7/7 Schuko	
		230-240 (CE)	825-897	3.6-3.7	BS-1363	
GRS-60-J*	60" x 5.25" (1524 x 133 mm)	120	900	7.5	NEMA 5-15P	53 lbs (24 kg)
		220	822	3.7	CEE 7/7 Schuko	
		240	978	4.1	BS-1363	
		220-230 (CE)	822-900	3.7-3.9	CEE 7/7 Schuko	
		230-240 (CE)	900-978	4.1	BS-1363	
GRS-66-J*	66" x 5.25" (1676 x 133 mm)	120	975	8.1	NEMA 5-15P	60 lbs (28 kg)
		220	891	4.1	CEE 7/7 Schuko	
		240	1059	4.4	BS-1363	
		220-230 (CE)	891-975	4.1-4.2	CEE 7/7 Schuko	
		230-240 (CE)	975-1059	4.2-4.4	BS-1363	
GRS-72-J*	72" x 5.25" (1829 x 133 mm)	120	1050	8.8	NEMA 5-15P	64 lbs (30 kg)
		220	960	4.4	CEE 7/7 Schuko	
		240	1140	4.8	BS-1363	
		220-230 (CE)	960-1050	4.4-4.6	CEE 7/7 Schuko	
		230-240 (CE)	1050-1140	4.6-4.8	BS-1363	

23.5" (597 mm) DEPTH (K)

Model	Dimensions (W x H)	Voltages Single phase	Watts	Amps	Plug	Ship Weight†
GRS-18-K	18" x 2.25" (457 x 57 mm)	120	325	2.7	NEMA 5-15P	23 lbs (11 kg)
		220	296	1.3	CEE 7/7 Schuko	
		240	354	1.5	BS-1363	
		220-230 (CE)	296-325	1.3-1.4	CEE 7/7 Schuko	
		230-240 (CE)	325-354	1.4-1.5	BS-1363	
GRS-24-K	24" x 2.25" (610 x 57 mm)	120	425	3.5	NEMA 5-15P	27 lbs (13 kg)
		220	388	1.8	CEE 7/7 Schuko	
		240	462	1.9	BS-1363	
		220-230 (CE)	388-425	1.8	CEE 7/7 Schuko	
		230-240 (CE)	425-462	1.8-1.9	BS-1363	
GRS-30-K	30" x 2.25" (762 x 57 mm)	120	525	4.4	NEMA 5-15P	33 lbs (15 kg)
		220	480	2.2	CEE 7/7 Schuko	
		240	571	2.4	BS-1363	
		220-230 (CE)	480-525	2.2-2.3	CEE 7/7 Schuko	
		230-240 (CE)	525-571	2.3-2.4	BS-1363	
GRS-36-K	36" x 2.25" (914 x 57 mm)	120	625	5.2	NEMA 5-15P	36 lbs (17 kg)
		220	572	2.6	CEE 7/7 Schuko	
		240	679	2.8	BS-1363	
		220-230 (CE)	572-625	2.6-2.7	CEE 7/7 Schuko	
		230-240 (CE)	625-679	2.7-2.8	BS-1363	
GRS-42-K*	42" x 5.25" (1067 x 133 mm)	120	750	6.3	NEMA 5-15P	43 lbs (20 kg)
		220	684	3.1	CEE 7/7 Schuko	
		240	816	3.4	BS-1363	
		220-230 (CE)	684-750	3.1-3.3	CEE 7/7 Schuko	
		230-240 (CE)	750-816	3.3-3.4	BS-1363	
GRS-48-K*	48" x 5.25" (1219 x 133 mm)	120	850	7.1	NEMA 5-15P	48 lbs (22 kg)
		220	776	3.5	CEE 7/7 Schuko	
		240	924	3.9	BS-1363	
		220-230 (CE)	776-850	3.5-3.7	CEE 7/7 Schuko	
		230-240 (CE)	850-924	3.7-3.9	BS-1363	
GRS-54-K*	54" x 5.25" (1372 x 133 mm)	120	950	7.9	NEMA 5-15P	52 lbs (24 kg)
		220	868	3.9	CEE 7/7 Schuko	
		240	1033	4.3	BS-1363	
		220-230 (CE)	868-950	3.9-4.1	CEE 7/7 Schuko	
		230-240 (CE)	950-1033	4.1-4.3	BS-1363	
GRS-60-K*	60" x 5.25" (1524 x 133 mm)	120	1050	8.8	NEMA 5-15P	56 lbs (26 kg)
		220	960	4.4	CEE 7/7 Schuko	
		240	1142	4.8	BS-1363	
		220-230 (CE)	960-1050	4.4-4.6	CEE 7/7 Schuko	
		230-240 (CE)	1050-1142	4.6-4.8	BS-1363	
GRS-66-K*	66" x 5.25" (1676 x 133 mm)	120	1150	9.6	NEMA 5-15P	68 lbs (31 kg)
		220	1052	4.8	CEE 7/7 Schuko	
		240	1250	5.2	BS-1363	
		220-230 (CE)	1052-1150	4.8-5.0	CEE 7/7 Schuko	
		230-240 (CE)	1150-1250	5.0-5.2	BS-1363	
GRS-72-K*	72" x 5.25" (1829 x 133 mm)	120	1250	10.4	NEMA 5-15P	69 lbs (32 kg)
		220	1144	5.2	CEE 7/7 Schuko	
		240	1358	5.7	BS-1363	
		220-230 (CE)	1144-1250	5.2-5.4	CEE 7/7 Schuko	
		230-240 (CE)	1250-1358	5.4-5.7	BS-1363	

* Units 36" (914 mm) wide or less, height includes 1" (25 mm) legs. Units over 42" (1067 mm) wide, height includes 4" (1067 mm) legs.

† NSF requires units over 36" (914 mm) in width or weighing more than 80 lbs. (36 kg) to be either sealed, or raised on the installation surface with the 4" (102 mm) legs included.

† Shipping weight includes packaging.

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

(800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | equipsales@hatcocorp.com | intlsales@hatcocorp.com



Glo-Ray® Heated Shelves

Models: GRS-18, -24, -30, -36, -42, -48, -54, -60, -66, -72

SPECIFICATIONS

Glo-Ray® Heated Shelves

The shaded areas contain electrical information for International models


25.5" (648 mm) DEPTH (L)

Model	Dimensions (W x H)	Voltages Single Phase	Watts	Amps	Plug	Ship Weight†
GRS-18-L	18" x 2.25" (457 x 57 mm)	120	350	2.9	NEMA 5-15P	22 lbs (10 kg)
		220	319	1.5	CEE 7/7 Schuko	
		240	381	1.6	BS-1363	
		220-230 (CE)	319-325	1.4-1.5	CEE 7/7 Schuko	
		230-240 (CE)	325-381	1.5-1.6	BS-1363	
GRS-24-L	24" x 2.25" (610 x 57 mm)	120	475	4.0	NEMA 5-15P	26 lbs (12 kg)
		220	434	2.0	CEE 7/7 Schuko	
		240	516	2.2	BS-1363	
		220-230 (CE)	434-475	2.0-2.1	CEE 7/7 Schuko	
		230-240 (CE)	475-516	2.1-2.2	BS-1363	
GRS-30-L	30" x 2.25" (762 x 57 mm)	120	600	5.0	NEMA 5-15P	33 lbs (15 kg)
		220	549	2.5	CEE 7/7 Schuko	
		240	653	2.7	BS-1363	
		220-230 (CE)	549-600	2.5-2.6	CEE 7/7 Schuko	
		230-240 (CE)	600-653	2.6-2.7	BS-1363	
GRS-36-L	36" x 2.25" (914 x 57 mm)	120	725	6.0	NEMA 5-15P	37 lbs (17 kg)
		220	664	3.0	CEE 7/7 Schuko	
		240	788	3.3	BS-1363	
		220-230 (CE)	664-725	3.0-3.2	CEE 7/7 Schuko	
		230-240 (CE)	725-788	3.2-3.3	BS-1363	
GRS-42-L ♦	42" x 5.25" (1067 x 133 mm)	120	825	6.9	NEMA 5-15P	43 lbs (20 kg)
		220	753	3.4	CEE 7/7 Schuko	
		240	897	3.7	BS-1363	
		220-230 (CE)	753-825	3.4-3.6	CEE 7/7 Schuko	
		230-240 (CE)	825-897	3.6-3.7	BS-1363	
GRS-48-L ♦	48" x 5.25" (1219 x 133 mm)	120	950	7.9	NEMA 5-15P	50 lbs (23 kg)
		220	868	3.9	CEE 7/7 Schuko	
		240	1032	4.3	BS-1363	
		220-230 (CE)	868-950	3.9-4.1	CEE 7/7 Schuko	
		230-240 (CE)	950-1032	4.1-4.3	BS-1363	
GRS-54-L ♦	54" x 5.25" (1372 x 133 mm)	120	1075	9.0	NEMA 5-15P	58 lbs (27 kg)
		220	983	4.5	CEE 7/7 Schuko	
		240	1169	4.9	BS-1363	
		220-230 (CE)	983-1075	4.5-4.7	CEE 7/7 Schuko	
		230-240 (CE)	1075-1169	4.7-4.9	BS-1363	
GRS-60-L ♦	60" x 5.25" (1524 x 133 mm)	120	1200	10.0	NEMA 5-15P	60 lbs (28 kg)
		220	1098	5.0	CEE 7/7 Schuko	
		240	1306	5.4	BS-1363	
		220-230 (CE)	1098-1200	5.0-5.2	CEE 7/7 Schuko	
		230-240 (CE)	1200-1306	5.2-5.4	BS-1363	
GRS-66-L ♦	66" x 5.25" (1676 x 133 mm)	120	1325	11.0	NEMA 5-15P	65 lbs (30 kg)
		220	1213	5.5	CEE 7/7 Schuko	
		240	1441	6.0	BS-1363	
		220-230 (CE)	1213-1325	5.5-5.8	CEE 7/7 Schuko	
		230-240 (CE)	1325-1441	5.8-6.0	BS-1363	
GRS-72-L ♦	72" x 5.25" (1829 x 133 mm)	120	1450	12.0	NEMA 5-15P	69 lbs (32 kg)
		220	1328	6.0	CEE 7/7 Schuko	
		240	1576	6.6	BS-1363	
		220-230 (CE)	1328-1450	6.0-6.3	CEE 7/7 Schuko	
		230-240 (CE)	1450-1576	6.3-6.6	BS-1363	

CORD LOCATION

Center of side with controls.

PLUG CONFIGURATIONS

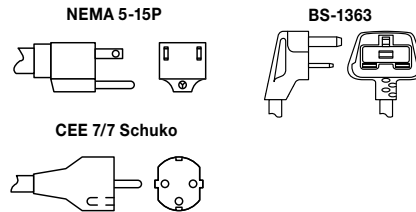

* Units 36" (914 mm) wide or less, height includes 1" (25 mm) legs.
Units over 42" (1067 mm) wide, height includes 4" (1067 mm) legs.

♦ NSF requires units over 36" (914 mm) in width or weighing more than 80 lbs. (36 kg) to be either sealed, or raised on the installation surface with the 4" (102 mm) legs included.

† Shipping weight includes packaging.

PRODUCT SPECS

Heated Shelves

The Heated Shelf shall be a Glo-Ray®... as manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A. The Shelf shall be rated at ... watts, ... volts, and be ... inches (millimeters) in overall width. It shall consist of a thermostatically-controlled heated base and a cord with plug attached.

Accessories shall include 4" (102 mm) adjustable legs, slant leg kit and pan rail.
Warranty consists of 24/7 parts and service assistance (U.S. and Canada only).

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

(800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | equipsales@hatcocorp.com | intlsales@hatcocorp.com