Project #:

Item #:

MENUMASTER[®] Resources



Model JET5192 shown

Heavy Volume | Combination Cooking This category of combination oven is ideal for...

- Application: - Wine bars
 - wine b
 - Pubs
 - Kiosks
- Country club,Bakery/cafés
- Convenience stores
- Supermarkets

Location of oven(s):

- Kitchen shelf
- Kitchen countertop, single or stacked
- Equipment stand, single or stacked

All ACP, Inc. commercial ovens are backed by our Culinary Center. Call us with any question regarding food preparation, menu development and cooking times. 866-426-2621.



High Speed Combination Oven Menumaster[®] Commercial Jetwave[™] Model JET5192

Power Output

- Convection:
 - 2700 W
 - 65°-250°C 150°- 475°F temperature range
 - Convected air for enhanced toasting and browning
- Microwave:
 - 1900 W
 - Heats quickly, reduces cooking time

Cuts Costs

- Uses less energy than a conventional oven.
- Eliminates need for pre-cooking and holding.
- Uses quarter size metal trays, pans and screens.

Simplifies Cooking

- Touch pad operation for consistent results.
- Controls are intuitive and simple to use.
- Stores up to 100 menu items.
- Four stage cooking option.
- USB Port compatible with standard flash drives, updates programming in seconds.
- 34 liter (1.2 cubic ft.) oven capacity.
- Door opens 90°+ for full access to the oven cavity.
- Single rack position for optimal and consistent cooking results.

Easy to Use and Maintain

319-368-8120

- Braille touch pads are ADA compliant.
- Stainless steel door and interior.
- Removable, cleanable air filter and clean filter reminder protect oven components.
- Backed by the ACP, Inc. 24/7 ComServ Support Center 866-426-2621.

AIA File


Part No. 20154107 Updated 8/15/14 Original Instructions



©2014 ACP, Inc. Cedar Rapids, Iowa 52404

the center

Menumaster[®] Commercial Jetwave [™] Model JET5192 | High Speed Combination Oven

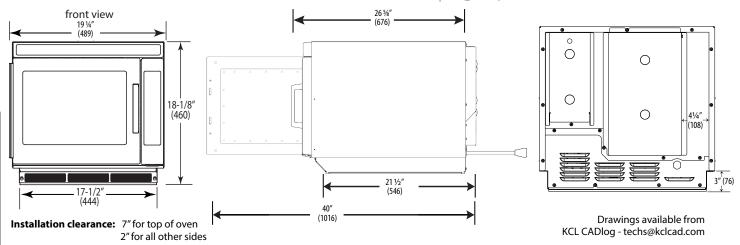

Specifications		Specifications
Model	JET5192 UPC Code 728028244762	Oven shall combine two cooking mode
Cooking Power*	2700W 1900W Convection Microwave	and microwave for high speed cooking. shall be programmable with the ability 100 menu items, single or double digit e
Configuration	Countertop	shall be automatically updated using a
Control System	Touch	compatible with standard USB flash driv
Programmable Control Pads	10	be 11 power levels and 4 cooking stage
Braille	Yes	output shall be 1900 watts and distribut
Total Programmable Setting:	s 100	of the cavity. The 2700 watt convection
Power Levels	11	a temperature range from 70° - 250°C (1
Max. Cooking Time	16:00	increments . The convection fan located
Stackable	Yes	the cavity shall distribute the heat throu to further enhance browning. Maximun
Time Entry Option	Yes	cooking time shall be 16 minutes. Over
Microwave Distribution	Rotating antennas, top	powder coat exterior. 34 liter (1.2 cubic
Magnetrons	2	shall be stainless steel construction with
Display	LED-backlit LCD	door. Interior shall have 1 rack position.
Stage Cooking	Yes, 4	easily accessible and removable from th
Door Opening	Grab & Go	and have a "clean filter" reminder featur
USB Port	Yes	stackable. Microwave oven shall comply
Temperature Range	70° - 250°C (150° - 475°F)	by the U.S Department of Health and Hu
Air Filter	Yes, removable, with clean filter reminder	ETL listed for safety and sanitation.
Rack	1 rack position, removable	
Exterior Dimensions	H 460 (18 1/8") W 489 (19 1/4") D** 676 (26 5/8")	Optional Accessories
Cavity Dimensions	H 267 (10 ½") W 330 (13") D 381 (15")	Pizza stone Drin travi
Door Depth	994 (39 1⁄8") , 90°+ door open	 Drip tray Oven paddle
Usable Cavity Space	1.2 cubic ft. (34 liter)	
Exterior Finish	Powder Coat	Warranty
Interior Finish	Stainless steel	Warranty Certificate for this product car
Power Consumption	3100 W, 14 A	ACP, Inc. website at:
Power Output*	1900 W* Microwave	www.acpsolutions.com/warranty
Power Source	230 V, 50 Hz, 16 A single phase	Service
Plug Configuration / Cord	CEE 7/7 "Schuko" 1.5 m (5 ft.)	All products are backed by the ACP, Inc. 24/7 ComServ
Frequency	2450 MHz	Support Center.
Product Weight	49 kg. (107 lbs.)	
Ship weight (approx.)	51 kg. (112 lbs.)	
Shipping Carton Size	H 546 (21 ½") W 546 (21 ½") D 756 (29 ¾")	

es: convection g. Control panel to program up to entry. Programs USB Port that is ives. There shall es. Microwave uted from the top n oven shall provide (150° - 475° F) in 5° d in the back of ughout the cavity m microwave en shall have a ic ft.) oven cavity th stainless oven n. Air filter shall be the front of the oven ure. Oven shall be ly with standards set Human Services, and

an be found on the





AIA File #: Measurements are in inches

* IEC 60705 Tested ** Includes handle

Part No. 20154107 Updated 12/17/14 **Original Instructions**



800-233-2366

©2014 ACP, Inc. Cedar Rapids, Iowa 52404

Specification #:

Fax: 319-368-8198